

DSS SERIES

RE-VERBER-RAY®


by Detroit Radiant Products Company

Designer Series

MEDIUM-WAVE ELECTRIC INFRARED HEATER

Decorative option for heating high-end patios and outdoor areas by providing spot, total, or comfort heat.

Outdoor approved DSS Series heaters produce medium-wave, instant heat with the use of new technology, carbon lamps encased in a IP55 rated, compact, slim, black enclosure. This heater offers a remote control with timer functionality and four power settings. Operational benefits include a highly efficient energy transfer, even heat distribution, and intense heat output.

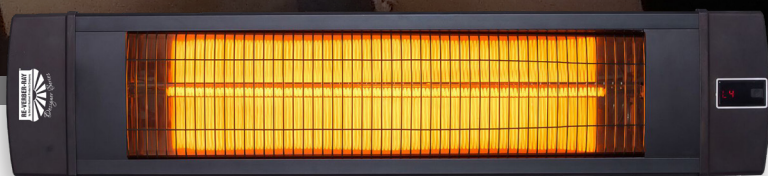

BENEFITS OF HEATING WITH ELECTRIC INFRARED


- Superior Comfort
- Reduced Energy Consumption
- Durability
- Even Heat Distribution
- Outdoor Tested & Approved
- Long Lamp Life Expectancy

PRODUCT FEATURES

- IP55 Design for Outdoor Use
- Remote Control with 4 Power Settings
- High Efficiency Carbon Fiber Lamps
- Compact, Slim Design
- Instant Heat
- Overheat & Tip Over Protection

DSS SERIES

MEDIUM-WAVE ELECTRIC INFRARED HEATER

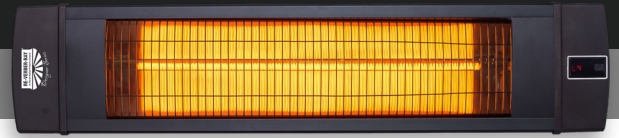

PRODUCT SPECIFICATIONS

-  **Electrical Consumption:**
From 1,500 to 2,500 watts
-  **Housing:**
Black Rust-Proof Body
-  **Equivalent BTU/h:**
5,118 to 8,530 BTU/h
-  **Certifications & Approvals:**
ETL Listed, Commercial/Industrial, Outdoor Residential, IP55 Water Resistant
-  **Length:**
34.5" L x 7.7" W x 3.3" H
-  **Limited Warranty:**
1 year (All Components)
-  **Lamp Elements:**
White Carbon Fiber
-  **Electrical:**
120VAC (1,500 watts); or 230VAC (2,500 watts)

AVAILABLE DSS MODELS & CLEARANCES



MODEL #	WATTS	VOLTS	AMPS	BTU's	MOUNTING HEIGHTS ¹	MOUNTING ANGLE ²	SIDE	TOP	BELOW
DSS-35B1-A15	1,500	120	12.5	5,118	7' to 9'	CLEARANCES TO COMBUSTIBLES ³ (INCHES)	13	4	50
DSS-35B1-C25	2,500	230	10.87	8,530	8' to 12'		13	4	50

¹ Factory recommended mounting heights are provided as a guideline. Actual conditions may dictate variations from the above data.

² Refer to DSS Manual for additional information about clearances for 45° Mounting Angle.

³ Supplied bracket to be used for 0° mounting only.

Always maintain the published clearances to combustibles. Clearances published in DSS Series manual and on warning label supersede data shown on this brochure.

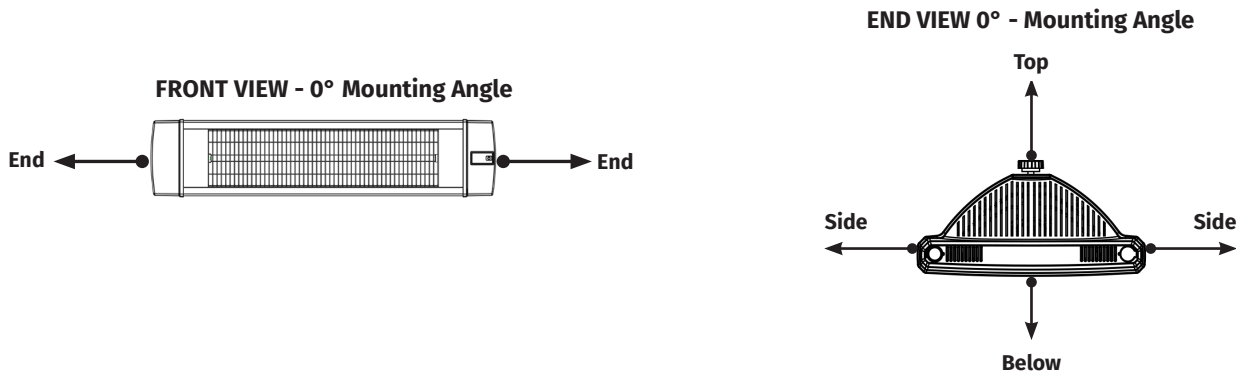

21400 Hoover Road, Warren, Michigan 48089 USA
+1.586.756.0950 | sales@drp-co.com

www.REVERBERRY.com



Form No. LBDSS_0918 (DRPC)

